




KIT - M01 THIRA / KIT- M02 THIRA WIRING DIAGRAM (4+N)

Description: this system offers the ability for communication between the entrance and an unlimited number of inphones
 Parallel connection of up to 3 inphones with common call. Electronic call sound from the entrance. Simultaneous activation of speech and lock opening. Independent regulation of loudspeaker volume from the Rectifier.

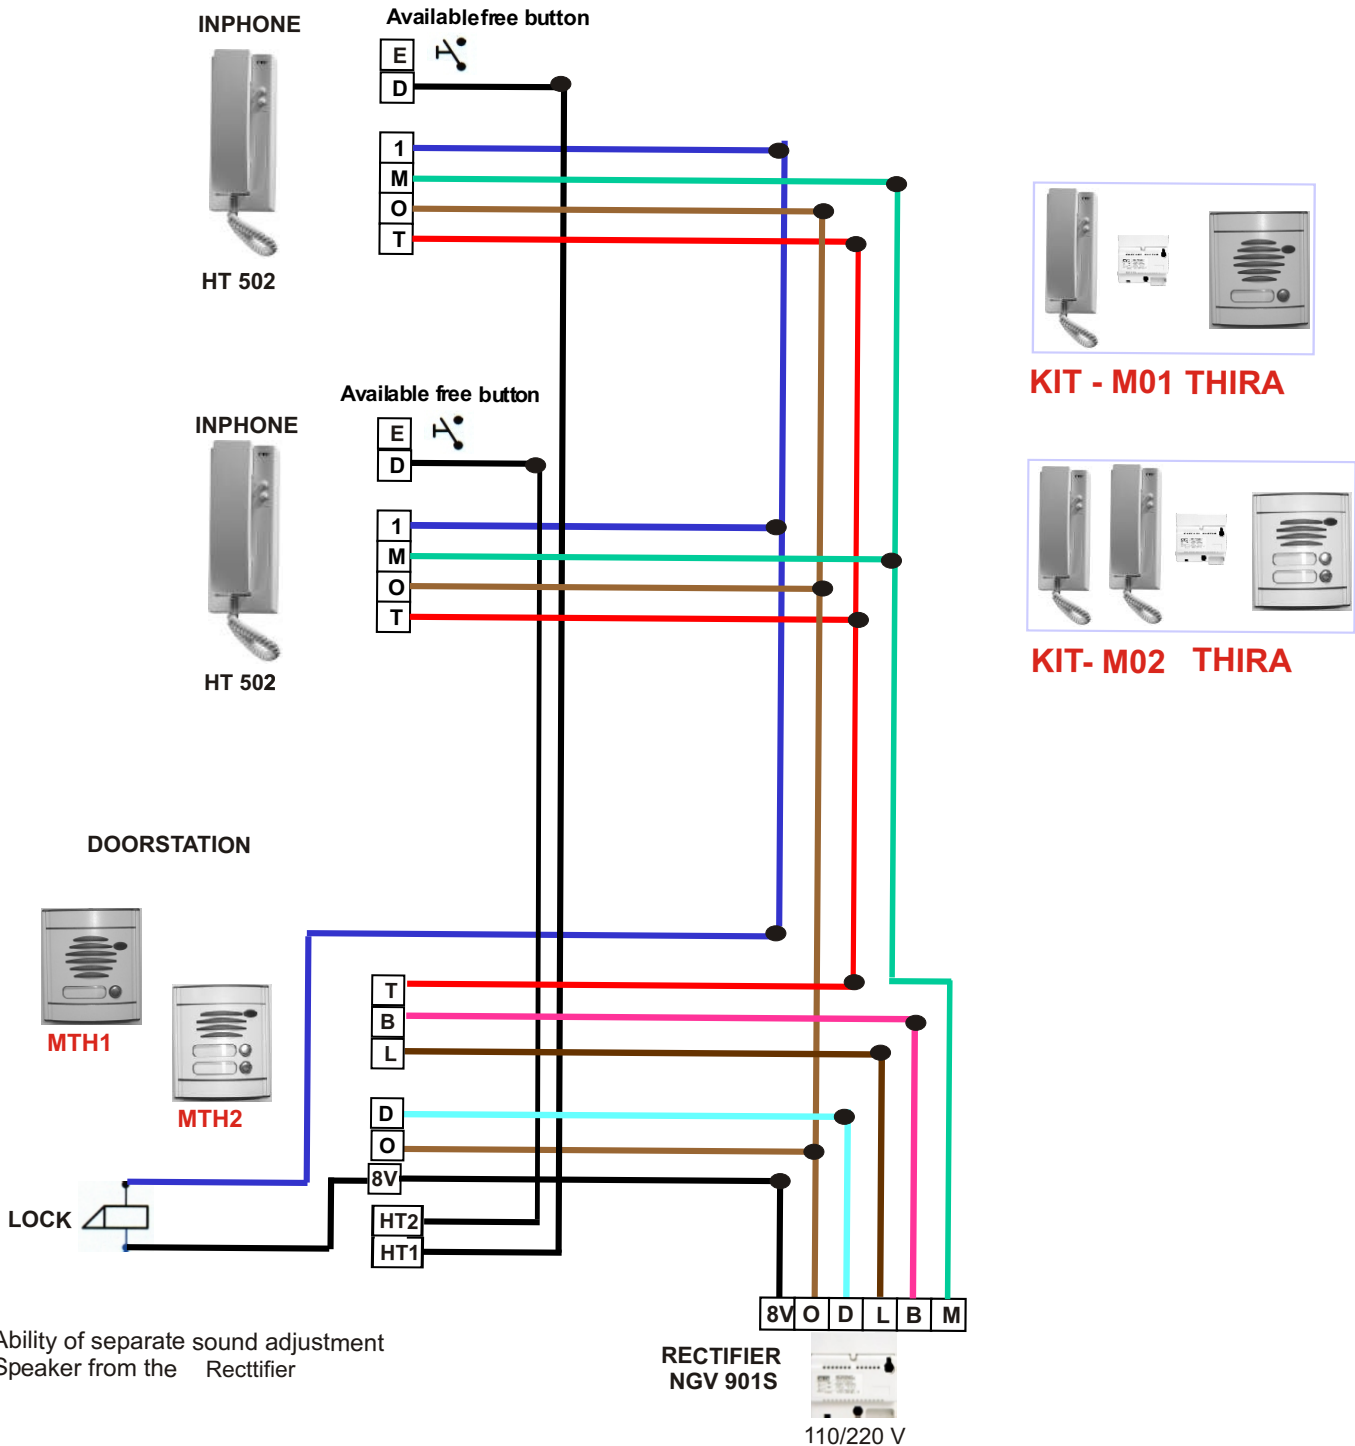

Ability of separate sound adjustment
 Speaker from the Rectifier

CABLE CROSS SECTIONS FROM MAXIMUM DISTANCES
 WITH CABLE IMPEDANCE OF 20 Ω

Distance in meters (m)	Cross section in mm
Up to 100m	0,8
Up to 200m	1,0
Up to 300m	1,5

NGV 901S TECHNICAL SPECIFICATIONS :

- 8V~ 14V / AC / 1,4A, for maximum duration 4 seconds
- O common minus/ earth (DC and AC secondary)
- B 9,5V / DC / 0,3A constant operation
- L Output –Amplification (Loudspeaker=16 Ohm)
- M Microphone input
- D Calling sound melody