

PRODUCT DATASHEET

LED WORKLIGHT S-STAND 20 W 4000 K

WORKLIGHTS S-STAND | Flexible, portable worklight



AREAS OF APPLICATION

- Renovation
- Garages
- Basement
- Workshops

PRODUCT BENEFITS

- Optimized weight and size due to compact design
- Energy savings of up to 80% compared to halogen lamp worklights
- Semi-frosted, tempered glass cover for uniform illumination

PRODUCT FEATURES

- Worklight with swiveling head
- Type of protection, luminaire head and housing: IP65, Type of protection, plug: IP44
- Quick-release fastener for adjustment of luminaire head angle
- 2 m cable with type E/F plug



TECHNICAL DATA

Electrical data

Nominal wattage	20.00 W
Operating mode	Electronic control gear (ECG)
Nominal voltage	220...240 V
Mains frequency	50/60 Hz


Photometrical data

Color temperature	4000 K
Color rendering index Ra	≥80
Light color (designation)	Cool White
Luminous flux	1700 lm
Luminous efficacy	85 lm/W

Light technical data

Beam angle	120 °
-------------------	-------

Dimensions & weight

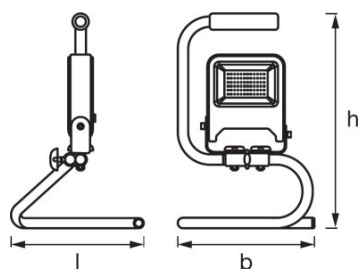

Length	166.0 mm
Width	180.0 mm
Height	280.0 mm
Product weight	960.00 g

Colors & materials

Body material	Aluminum/Steel
Product color	Dark gray
Housing color	Dark gray
Cover material	Glass
Light emitting surface material	Glass

Temperatures & operating conditions

Ambient temperature range	-20...+45 °C
----------------------------------	--------------

Lifespan

Number of switching cycles	100000
-----------------------------------	--------

Additional product data

Mounting type	Standing
Mounting location	Floor

Capabilities

Dimmable	No
Adjustable	Yes
Type of connection	Protective contact Plug type
LED module replaceable	Not replaceable

Certificates & standards

Protection class	I
Type of protection	IP65 ¹⁾
Standards	CE/EAC/REACH/ROHS

¹⁾ Luminaire head and housing IP65, plug IP44

EQUIPMENT / ACCESSORIES

– Complete mounting and connecting accessories included

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075213838	Folding carton box 1	81 mm x 181 mm x 245 mm	1028.00 g	3.59 dm ³
4058075213845	Shipping carton box 10	415 mm x 375 mm x 265 mm	10872.00 g	41.24 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.