


ASPIRATORE ELICOIDALE - AXIAL FAN



MODELLO MODEL	A	B	C	D	ØE	F
ALBA 10/4"	160	160	53	40	100	7
ALBA 12/5"	180	180	53	44	120	7
ALBA 15/6"	210	210	66	47	150	7

CE IPX4 T45 CB

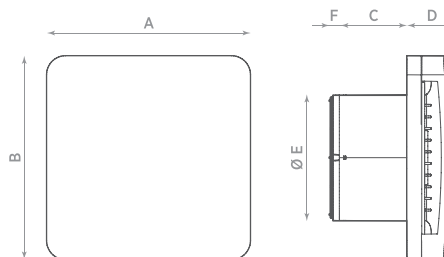

Aspiratori elicoidali per espulsione aria direttamente all'esterno o in brevi condotti.

- Cover di design;
- Spia di funzionamento presente su tutti i modelli;
- Griglia e cover montaggio "a scatto";
- Motore su cuscinetti a sfera per una lunga durata;
- Serranda posteriore "anti-ritorno";
- Rapido fissaggio con l'utilizzo di sole due viti;
- Per condotti Ø 100-120-150 mm;
- Versioni: Base, Timer, HT;
- Alte prestazioni, silenzioso e a basso consumo;
- Grado di protezione: IPX4 (Norma EN 60529);
- Temperatura ambiente di esercizio 45°C;
- Conformi alla Norma EN 60335-2-80;
- **POSIZIONAMENTO:** a parete, a soffitto.


Axial fans to extract air directly outside or through short ducting also suitable for glass application with optional glass kit.



- New cover design;
- Operating indicator light on all models;
- Click assembly of the grille and of the cover;
- Long life ball bearing motor;
- Backdraught shutter;
- Two fixing screws for an easy installation;
- For ducts Ø 100-120-150 mm;
- Versions: Base, Timer, HT;
- High performances, low sound level and low power consumption;
- IPX4 protected (EN 60529);
- 45° C working temperature;
- In accordance with Standard EN 60335-2-80;
- **POSITIONING:** wall mounting, ceiling mounting.

DATI TECNICI - TECHNICAL DATA

MODELLO MODEL	CODICE CODE	Ø FORO Ø HOLE (mm)	TENSIONE VOLTAGE (Volt)	FREQUENZA FREQUENCY (Hz)	PORTATA FLOW RATE (m³/h)		PRESS. MAX	PRESS. MAX	POTENZA POWER (W)	RUMOROSITÀ NOISE dB(A) _{3m}	PESO WEIGHT (kg)
					CON SERRANDA WITH SHUTTER	SENZA SERRANDA WITHOUT SHUTTER	MAX PRESS. (mm H ₂ O)	MAX PRESS. (Pa)			
ALBA 10/4"	0053110	100	220-240	50	80	95	2,8	28	10	34,6	0,5
ALBA 10/4" T	0053111	100	220-240	50	80	95	2,8	28	10	34,6	0,5
ALBA 10/4" HT	0053112	100	220-240	50	80	95	2,8	28	10	34,6	0,5
ALBA 12/5"	0053210	120	220-240	50	135	150	4,6	45	16	37	0,6
ALBA 12/5" T	0053211	120	220-240	50	135	150	4,6	45	16	37	0,6
ALBA 12/5" HT	0053212	120	220-240	50	135	150	4,6	45	16	37	0,6
ALBA 15/6"	0053310	150	220-240	50	240	260	5,9	58	29	41,5	0,8
ALBA 15/6" T	0053311	150	220-240	50	240	260	5,9	58	29	41,5	0,8
ALBA 15/6" HT	0053312	150	220-240	50	240	260	5,9	58	29	41,5	0,8

GRAFICI DI PORTATA - FLOW CHARTS

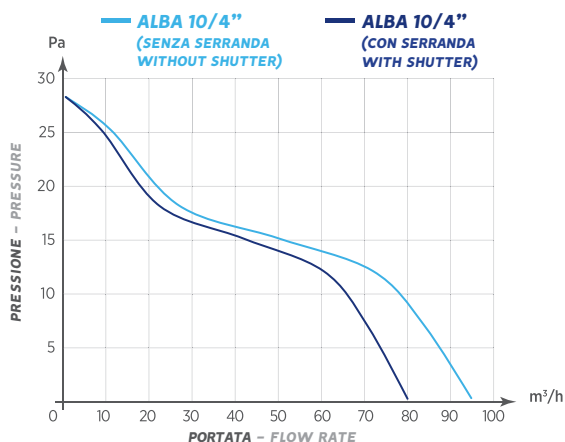

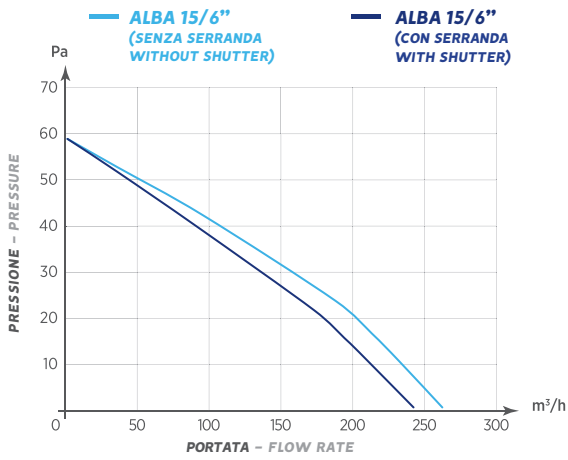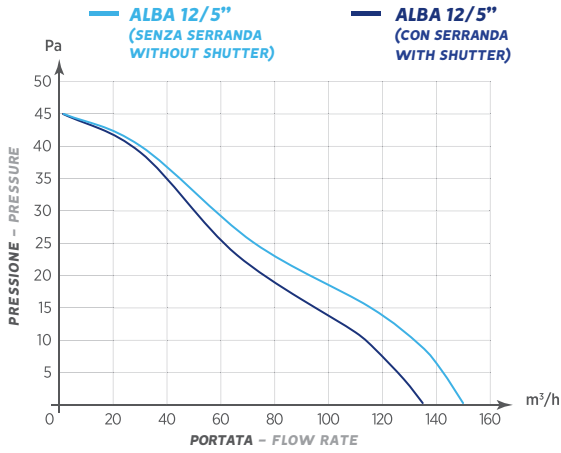

ACCESSORI (PAGINA 66) - ACCESSORIES (PAGE 66)



Griglia
Grille



Serranda
Shutter



Regolatori
Controllers



Sensori
Sensors



Timertronic
Timertronic



Timermatic
Timermatic