

# Product datasheet

## DPRO STICK 30 W/840 E27

OSRAM DULUX PRO STICK | Compact fluorescent integrated, stick shape



### Areas of application

- High-quality domestic and professional environments
- Wherever light is required quickly
- General illumination
- Outdoor use in enclosed and ventilated luminaires only

### Product benefits

- Excellent price/performance ratio
- Extremely fast lumen ramp-up thanks to Quick Light Technology
- Great variety of light colors

### Product features

- Quick Light: 60 % light output in  $\leq 20$  s
- Warm Comfort Light – energy-saving light similar to that of an incandescent lamp
- Good quality of light; color rendering index  $R_a: \geq 80$ ; constant chromaticity



# Product datasheet

## Technical data

### Photometrical data

Color rendering index Ra	≥80
--------------------------	-----

### Lifespan

Nominal lamp life time	10000 h
------------------------	---------

### Additional product data

Light colors, color rendering properties and Light Color Coordinates for OSRAM DULUX® - lamps with integrated control gear

Light Color LUMILUX®	Color Rendering Index (CRI), Ra	Target Color Coordinate X	Target Color Coordinate Y	Color Temperature [K]	
825 Warm Comfort Light	≥ 80	0.485	0.427	2500	
827 Warm White	≥ 80	0.463	0.420	2700	
840 Cool White	≥ 80	0.380	0.380	4000	
865 Cool Daylight	≥ 80	0.313	0.337	6500	

Datenname | ORG.D00E | Initial  
Textverarbeitung | TYPAN.L002




### Luminous intensity distribution

Appropriate disposal acc. to WEEE	Yes
-----------------------------------	-----

## Product datasheet

### Light Distribution

---

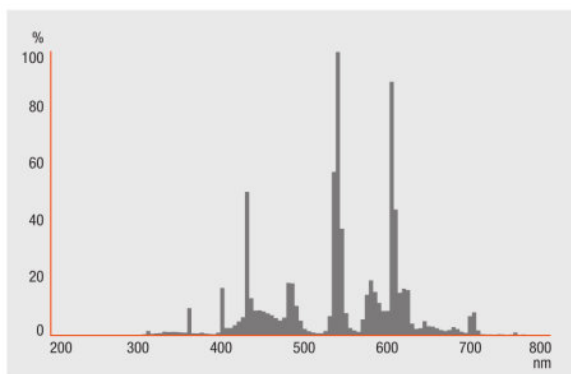

---

Spectral power distribution

---

### Safety advice

In case of lamp breakage: [www.osram.com/brokenlamp](http://www.osram.com/brokenlamp)  
Not for use with external dimmers or electronic switches.

---

### Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321987105	DPRO STICK 30 W/840 E27	Shipping carton box 10 Pieces Folding carton box	310 mm x 215 mm x 126 mm	8.40 dm <sup>3</sup>	1610.00 g

---

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM GMBH is distribution partner  
of LEDVANCE for Digital Lighting  
Systems and Components

**OSRAM**

OSRAM GmbH  
Marcel-Breuer-Strasse 6  
80807 Munich, Germany