

Logistic Data

Article No.	43119453
Code	RL-R63 60 DIM 827/WFL/E27
Product EAN	4008597194535
Customs tariff no.	85395000
Box quantity (pcs.)	10
EAN Box	4008597494536
Gross weight of box in kg	0.6
Length of box in m	0.34
Width of box in m	0.14
Height of box in m	0.12
ETIM class	EC001959
ETIM class name	LED-lamp/Multi-LED
Product status	Phase Out

Electric Parameters



Lamp power	4,5 W
Rated wattage	4.5 W
Energy Consumption kWh/1000h	4.5
Power factor	> 0,7
Nominal voltage	220-240 V
Nominal current	22 mA

Light Application Parameters

Luminous flux	370 lm
Luminous flux	370 lm
Luminous flux in 90°-sector	370 lm
Luminous intensity	960 cd
Beam angle	65 °
Luminous efficiency	82.22 lm/W
Colour temperature	2700 K
Colour temperature	2700 K
Colour rendering index Ra	80
Colour Stability	≤ 6 sdcn

Service Life

Mean service life	15000 h
Average nominal lifespan	15000 h

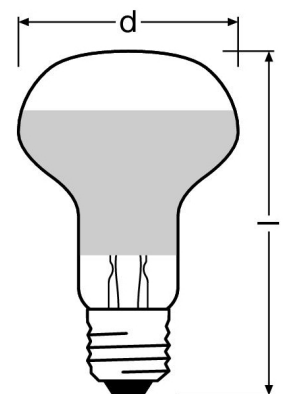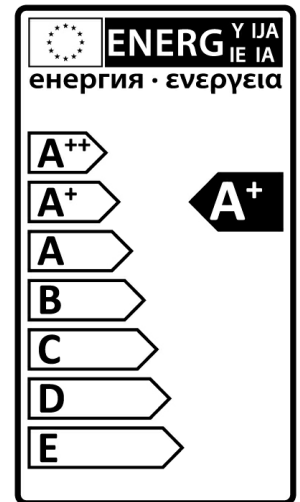

Specification

Diameter max.	63 mm
Diameter	63 mm
Length max.	100 mm
Length	100 mm
Mercury content	0.0 mg
dimnable	ja
Lamp shape	Reflector
Finish	clear with mirror
Colour	Other

Notes

R63-LED for exchange with halogen lamps, warm white light, glass bulb, dimmable, base E27. LED light does not contain UV or IR radiation.

Please, refer to www.radium.de/recycling for notes on disposal of burned-out lamps as well as lamp breakage.

The field 'info about service life' contains the frame conditions according to standards based on which the specific service life has been determined. So, for example, "12B50, 50Hz" means that the mean service life (B50) has been determined with a 12h switching cycle at mains (frequency 50Hz), "3B50, HF" is based on a 3h switching cycle at electronic control gear (high frequency).

Notes

Base



E27
IEC/EN 60061-1
sheet 7004-21-9


Spectrum

As daylight is a mixture of direct sunlight and light from the sky, the spectral distribution changes all the time due to the time of the day and the weather. The standard illuminant D65 corresponds to daylight with colour temperature of about 6500K.


The colour of coloured LEDs depends on the chemical elements within the light generating chip. The coloured light is generated directly and does not need filtering.

White LEDs are either RGB (red + green + blue chip in one LED = light colour white) or blue LED-chips with yellow/orange phosphor in the resin.

Visible region from 380 to 780 nm; height of graph corresponding with relative spectral emission (400mW/klm)per 10nm.

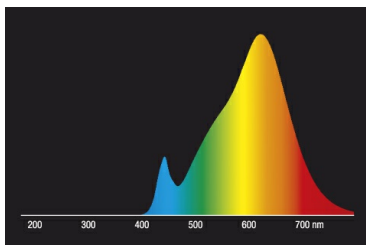

LED-Retrofit-Lamps 2700K

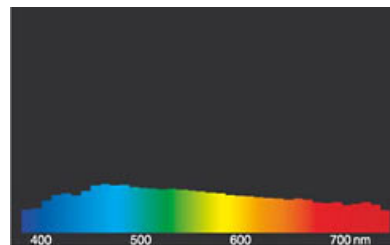

daylight(D 65)

Special features



General notes

The technical design data in accordance with DIN and IEC. The producer does not take any responsibility for damage to persons or property in case of unsuitable operation or handling of the product. Operating data and dimensions are valid within the usual tolerances. Related lamp types (different bases, mains voltages) may be available on request. Sale and delivery are effected in accordance with the Radium Terms of Delivery and Payment valid on the day of conclusion of contract. Packing units offer economical advantages to the purchase and logistic department. Please match your quantity volume accordingly. For orders of a minimum quantity (clefs) with a lamp model the amount lower than the volume of each packaging unit, we will invoice 10 % additional charge per lamp type. Technical changes and terms of delivery are reserved. Manipulation of any kind to packaging or product is not permissible as this will violate Radium brand rights. Furthermore, technical properties of the product can change to its disadvantage or even destruction. Therefore, Radium cannot be responsible for consequential damages.

® = Registered trademark

Subject to change without notice. Errors and omissions excepted.

All technical data without guarantee.